




1mm
ANTI-SCRATCH
ACRYLIC LAMINATE

Trendsetter



Beautiful
Collection

Genesis



GOIRIO[®]
style your interior

WHO WE ARE ?

Gloirio is a leading brand offering best in class furniture laminates. The company has attained the technology prowess and expertise. It offers a variety of laminates having unique features like innovative designs and distinctive patterns. Keeping the needs of architects and designers in mind, we have created this folder to portray an assembly of modern and trendy laminates suiting the needs of a classic attic and even contemporary abodes.

GLOIRIO[®]
style your interior



MAINTENANCE

- Genesis high gloss panel comes protected with a high-quality protective film which is only removed at the completion of all installation works.
- After the protective film is removed, there is still presence of solvent from the adhesive coating of the protective film on the surface of the high gloss panel. An electrostatic charge is built-in and attracts dust onto the surface of the panel.
- During this time, the acrylic panel surface also cures out under the influence of normal air humidity. Under normal circumstances, the Curing process will take approximately 72 hours for the surface to be totally cured.
- In order to speed up the process, we recommend cleaning the High gloss surface with COLIN Glass Cleaner and a soft Micro fibre cloth according to the procedure below.

Shake it well and lightly spray on the surface
Wipe the surface clean using a light circular motion

GENESIS

Genesis is the first wholly high gloss panel that comes in a variety of striking designs and colours. It has proven to be a success not only in the aesthetic sense but also in its competitive pricing compared to other European and Asian counterparts. Another distinguish feature of Genesis is the stunning edge-sealing finish that seems like back painted. It offers both color & smooth glass edge depending on our preference.

Finish: Glossy
Thickness: 1mm (+-10% Variation)
Dimension: 8ft x 4ft

COLLECTION

Size : 2440mm x 1220mm (8 Feet x 4 Feet)

Thickness : 1mm

APPLICATIONS

- Kitchen
- Bathroom
- Furniture
- Healthcare
- Commercial
- Hospitality & Restaurant
- Wall Cladding & Partition

Recommended
ADHESIVE
For Pressing

GLOIRIO
BOND
ADHESIVE



THE WAYS YOU CAN ENJOY THE ROYALNESS OF GLOIRIO LAMINATE TO MAKE YOUR DREAMS ALIVE IN SMART WAY.

To avoid the problems of appearing air bubbles and any yellow colour/dullness or yellow patches problem in the laminate sheet after installation of GLOIRIO laminate, Customer should know the some facts before buying GLOIRIO laminate.

As GLOIRIO laminate is 6H Acrylic laminate which have the scratch resistance characteristic and looks like back painted glass or colour lamination Please Follow some fact about installation of GLOIRIO laminate.

- Please check the laminate at the time of delivery, check whether it was not damage in transportation & handling and then use for installation.

- Before installing GLOIRIO laminate make sure that substrate (Plywood MDF, Particle Board) is good and superior quality of calibrated thickness and even surface.

- If there is usage of any interior quality or not as per standard quality dipped plywood and dipped lipping patti, kindly scrub dipped colour layer by using sand paper. Then use GLOIRIO laminate to avoid yellow colour patches.

- Clean the surface of substrate (Plywood, MDF, Particle Board) to make free from dust of grease by cloth, soft brush, sponge or sand paper.

- Always use water base PVACP (Polyethylene Vinyl-Acetate Co-Polymer) Adhesive like GLOIRIO BOND for GLOIRIO laminate.

- Stir the adhesive before using it, and do not mix water in adhesive.

- Spread the adhesive uniformly by brush, roller or adhesive spreader on both GLOIRIO laminate and substrate (Plywood, MDF, Particle Board).

- Please do not use the GLOIRIO laminate more than 4 Ft x 2 Ft Also leave at least 2mm of groove between two pieces of GLOIRIO laminate, so that at the time of pressing it will be easy for removing air from between of GLOIRIO laminate and substrate (Plywood, MDF, Particle Board)

- Use soft pinch roller or normal pressing technique at the time of pressing GLOIRIO laminate on the substrate (Plywood, MDF, Particle Board). And also pressing should be done from the middle of the panel and move towards to side line and corners of panel. So that air between the GLOIRIO laminate and substrate (Plywood, MDF, Particle Board) will be Removed.

- Please make sure, to give sufficient amount of pressing to GLOIRIO Laminate for almost 12hrs to 15hrs to achieve full bonding strength.

- Please do not use synthetic rubber adhesive (SR, JAT Pat, Bostic, Heatxetc.)

- After the installation of GLOIRIO Laminate please avoid the direct sunlight on it.

- Please don't place hot cookware directly on the GLOIRIO Laminate. Prolonged exposure to temperature above 30°C may cause patches to GLOIRIO Laminate.

WHY AIR BUBBLE APPEARS IN BETWEEN ACRYLIC LAMINATE AND SUBSTRATE (PLYWOOD, MDF, PARTICLE BOARD) AFTER THE INSTALLATION?

There are many reasons which lead to air bubble problems are as follows:

- Bonding of Acrylic laminate under high humidity atmosphere.

- Using of water base synthetic adhesive or other than PVACP (Polyethylene Vinyl Acetate Co-polymer) adhesive may also lead to air bubble after the installation Acrylic laminate.

- Many of time due to uncertain weather conditions Substrate (Plywood, MDF, Particle Board) absorbed moisture. After few days of installation Acrylic laminate on substrate, substrate gradually loses moisture. The moisture is the result of air bubble between Acrylic laminate and substrate after installation

- Using odd uneven surface Substrate (Plywood, MDF, Particle Board) Lead to debone at particular area of Acrylic laminate sheet and air bubble appear at that area after the installation

- When more than 4'X 2' of Acrylic laminate is used for panelling, it can lead to air bubble after installation

- Lack of pressing and short period of pressing at the time of bonding period of Acrylic laminate also lead to air bubble after the installation of Acrylic laminate.

- GLOIRIO sheets should be kept evenly Straight. if the sheets are in roll form it Should kept straight for minimum 48 hours and then you can press and laminate on the surface for better results.

WHY YELLOW PATCHES AND COLOUR FADE PROBLEM APPEARS AFTER THE INSTALLATION OF ACRYLIC LAMINATE?

The reason behind this problem is as follows :

- When Acrylic laminate experiences or faces direct fall of sunlight on it which leads to discolouring, fading and yellowness in laminate.

- Using of interior quality or not as per standard quality dipped plywood & dipped lipping patti may lose the colour due to chemical reaction between adhesive at the time of bonding period and yellow patches appear after the installation.

- Using synthetic rubber adhesive (SR / JatPat, Bostic, Heatex) lead to colour patches on Acrylic laminates.

- Prolonged exposure temperature above 30° cor placing hot cookware directly on the Acrylic laminates cause patches on Acrylic laminates surface.



GL-7304

Available Edge Bend in
1.3 mm Thickness : **GEB-14812**



GL-7339



**Artistic
Design**



GL-6901

ANTI-SCRATCH LAMINATE





ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-6901



Style of ART



GL-7338

Available Edge Bend in
1.3 mm Thickness : GEB-14843



GL-7328

Available Edge Bend in
1.3 mm Thickness : GEB-14804



ANTI-SCRATCH LAMINATE



GL-6902





Illuminance



ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-6902




G R A C E O F S I M P L I C I T Y

ANTI-SCRATCH LAMINATE



GL-6903

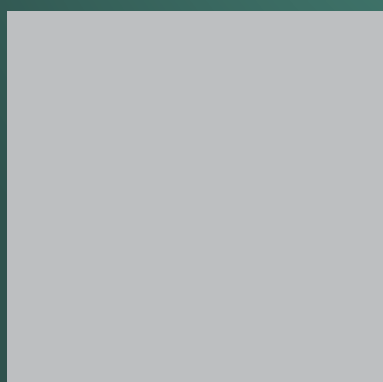

GL-7330

Available Edge Bend in
1.3 mm Thickness : GEB-13914



GL-7327



**Premium
Collection**





ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-6903



B E A U T I F Y T H E S P A C E



GL-6904



GL-7320

Available Edge Bend in
1.3 mm Thickness : GEB-13902



GL-7322



**Marble
Elemetn**

ANTI-SCRATCH LAMINATE



Ravishing



ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-6904




V I V I D G L O R Y O F M A R B L E



GL-7403



GL-7402

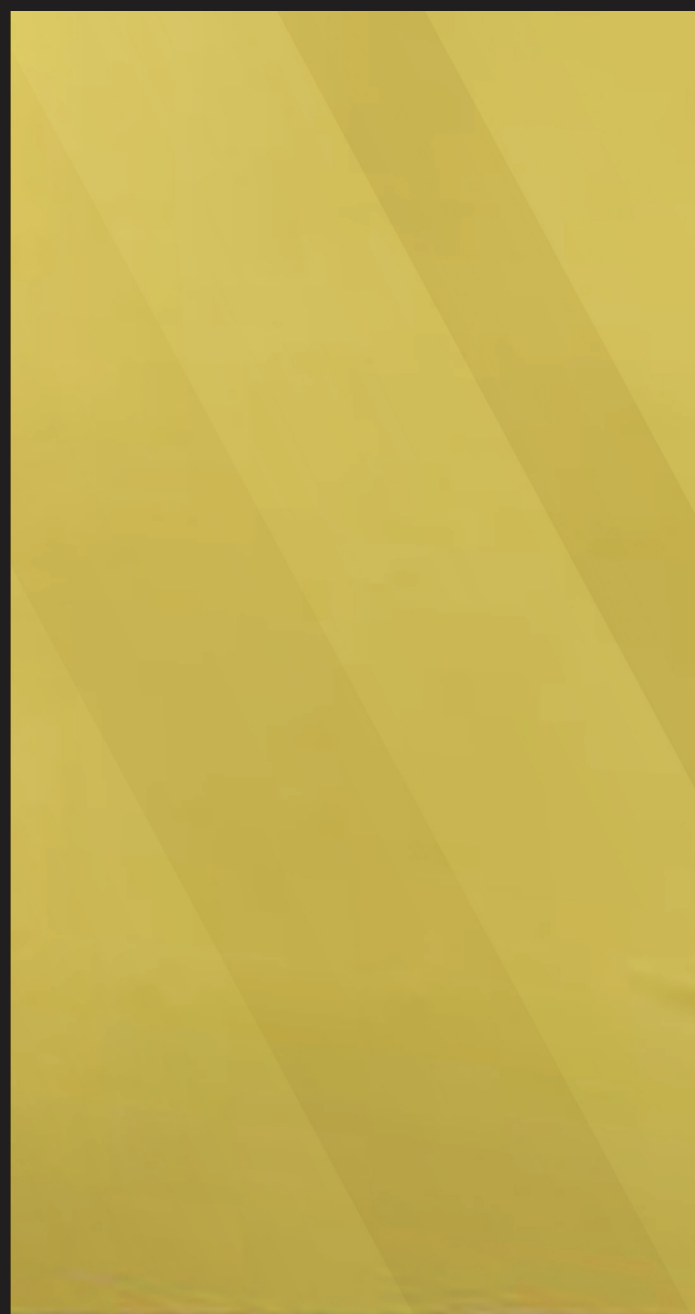

GL-7401

ANTI-SCRATCH LAMINATE





ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-7402

Mirror Reflection

R U S T I C C H A R M O F S U R F A C E




S Trend setter




1mm


ANTI-SCRATCH
ACRYLIC LAMINATE




GL-7313 Available Edge Bend in
1.3 mm Thickness : GEB-13913




GL-7317 Available Edge Bend in
1.3 mm Thickness : GEB-13906



GL-7333 Available Edge Bend in
1.3 mm Thickness : GEB-13929




GL-7345 Available Edge Bend in
1.3 mm Thickness : GEB-13906




GL-7326 Available Edge Bend in
1.3 mm Thickness : GEB-13906



GL-7307 Available Edge Bend in
1.3 mm Thickness : GEB-14801

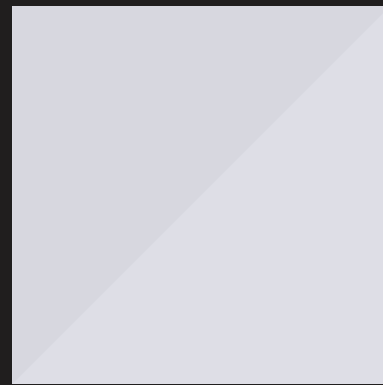


GL-7314

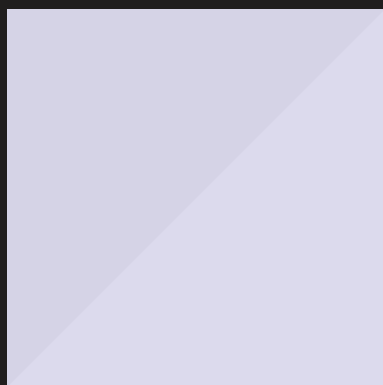

GL-7309



GL-7324 Available Edge Bend in
1.3 mm Thickness : GEB-14824



GL-7329 Available Edge Bend in
1.3 mm Thickness : GEB-14836

ANTI-SCRATCH LAMINATE





ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL




Used Laminate
GL-7333




Used Laminate
GL-7307





GL-7341




GL-7336

Available Edge Bend in
1.3 mm Thickness : **GEB-13920**



GL-7340

Available Edge Bend in
1.3 mm Thickness : **GEB-13910**



GL-7313

Available Edge Bend in
1.3 mm Thickness : **GEB-13913**



ANTI-SCRATCH LAMINATE





ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-7341




Used Laminate
GL-7340



C A L M A N D S E R E N E



GL-7332



GL-7317

Available Edge Bend in
1.3 mm Thickness : **GEB-13901**



GL-7346

Available Edge Bend in
1.3 mm Thickness : **GEB-13926**



GL-7342



ANTI-SCRATCH LAMINATE



ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-7332



Used Laminate
GL-7342






GL-7348

Available Edge Bend in
1.3 mm Thickness : **GEB-13925**




GL-7349

Available Edge Bend in
1.3 mm Thickness : **GEB-13915**



GL-7326

Available Edge Bend in
1.3 mm Thickness : **GEB-13906**



GL-7347

Available Edge Bend in
1.3 mm Thickness : **GEB-13922**





ANTI YELLOW



EASY TO CLEAN




HIGH GLOSS LEVEL




Used Laminate
GL-7349


Used Laminate
GL-7347





GL-7327




GL-7312

Available Edge Bend in
1.3 mm Thickness : GEB-13912



GL-7330

Available Edge Bend in
1.3 mm Thickness : GEB-13914



GL-7313

Available Edge Bend in
1.3 mm Thickness : GEB-13913

ANTI-SCRATCH LAMINATE





Refinement



ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-7327



Used Laminate
GL-7330



B E A U T Y O F W O R L D



ANTI-SCRATCH LAMINATE




GL-7305



GL-7328

Available Edge Bend in
1.3 mm Thickness : **GEB-14804**

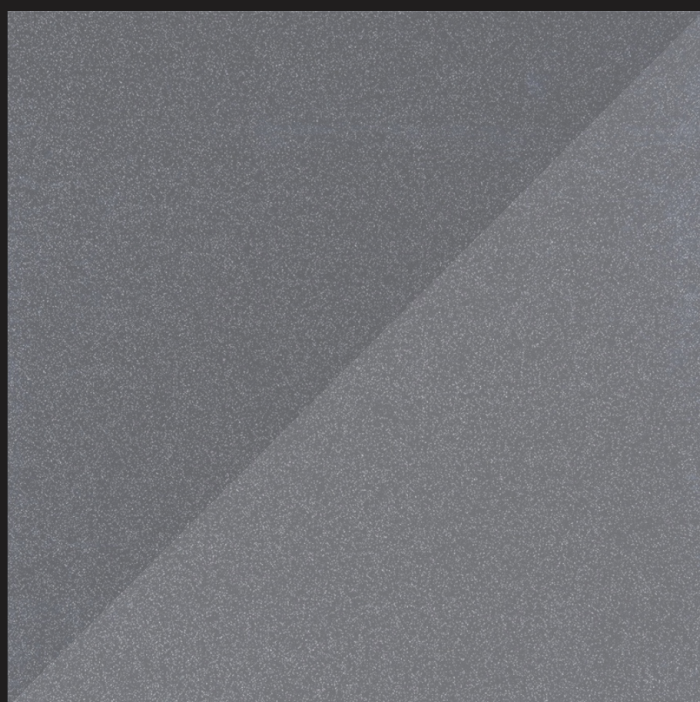

GL-7306

Available Edge Bend in
1.3 mm Thickness : **GEB-14821**



GL-7315



Used Laminate
GL-7306



Used Laminate
GL-7315





GL-7328

Available Edge Bend in
1.3 mm Thickness : **GEB-14804**




GL-7307

Available Edge Bend in
1.3 mm Thickness : **GEB-14801**



GL-7338

Available Edge Bend in
1.3 mm Thickness : **GEB-14843**

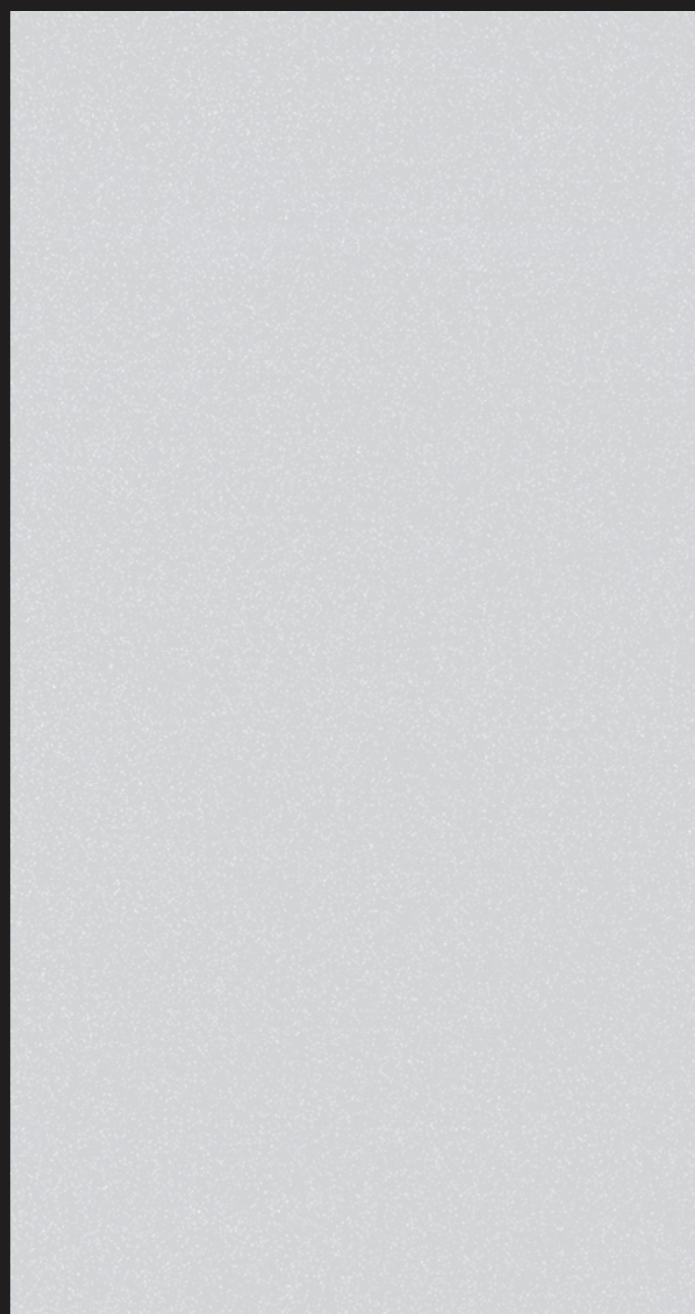

GL-7305



ANTI-SCRATCH LAMINATE





ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-7338





GL-7344




GL-7331



GL-7325

Available Edge Bend in
1.3 mm Thickness : GEB-13904




GL-7320

Available Edge Bend in
1.3 mm Thickness : GEB-13902


ANTI-SCRATCH LAMINATE



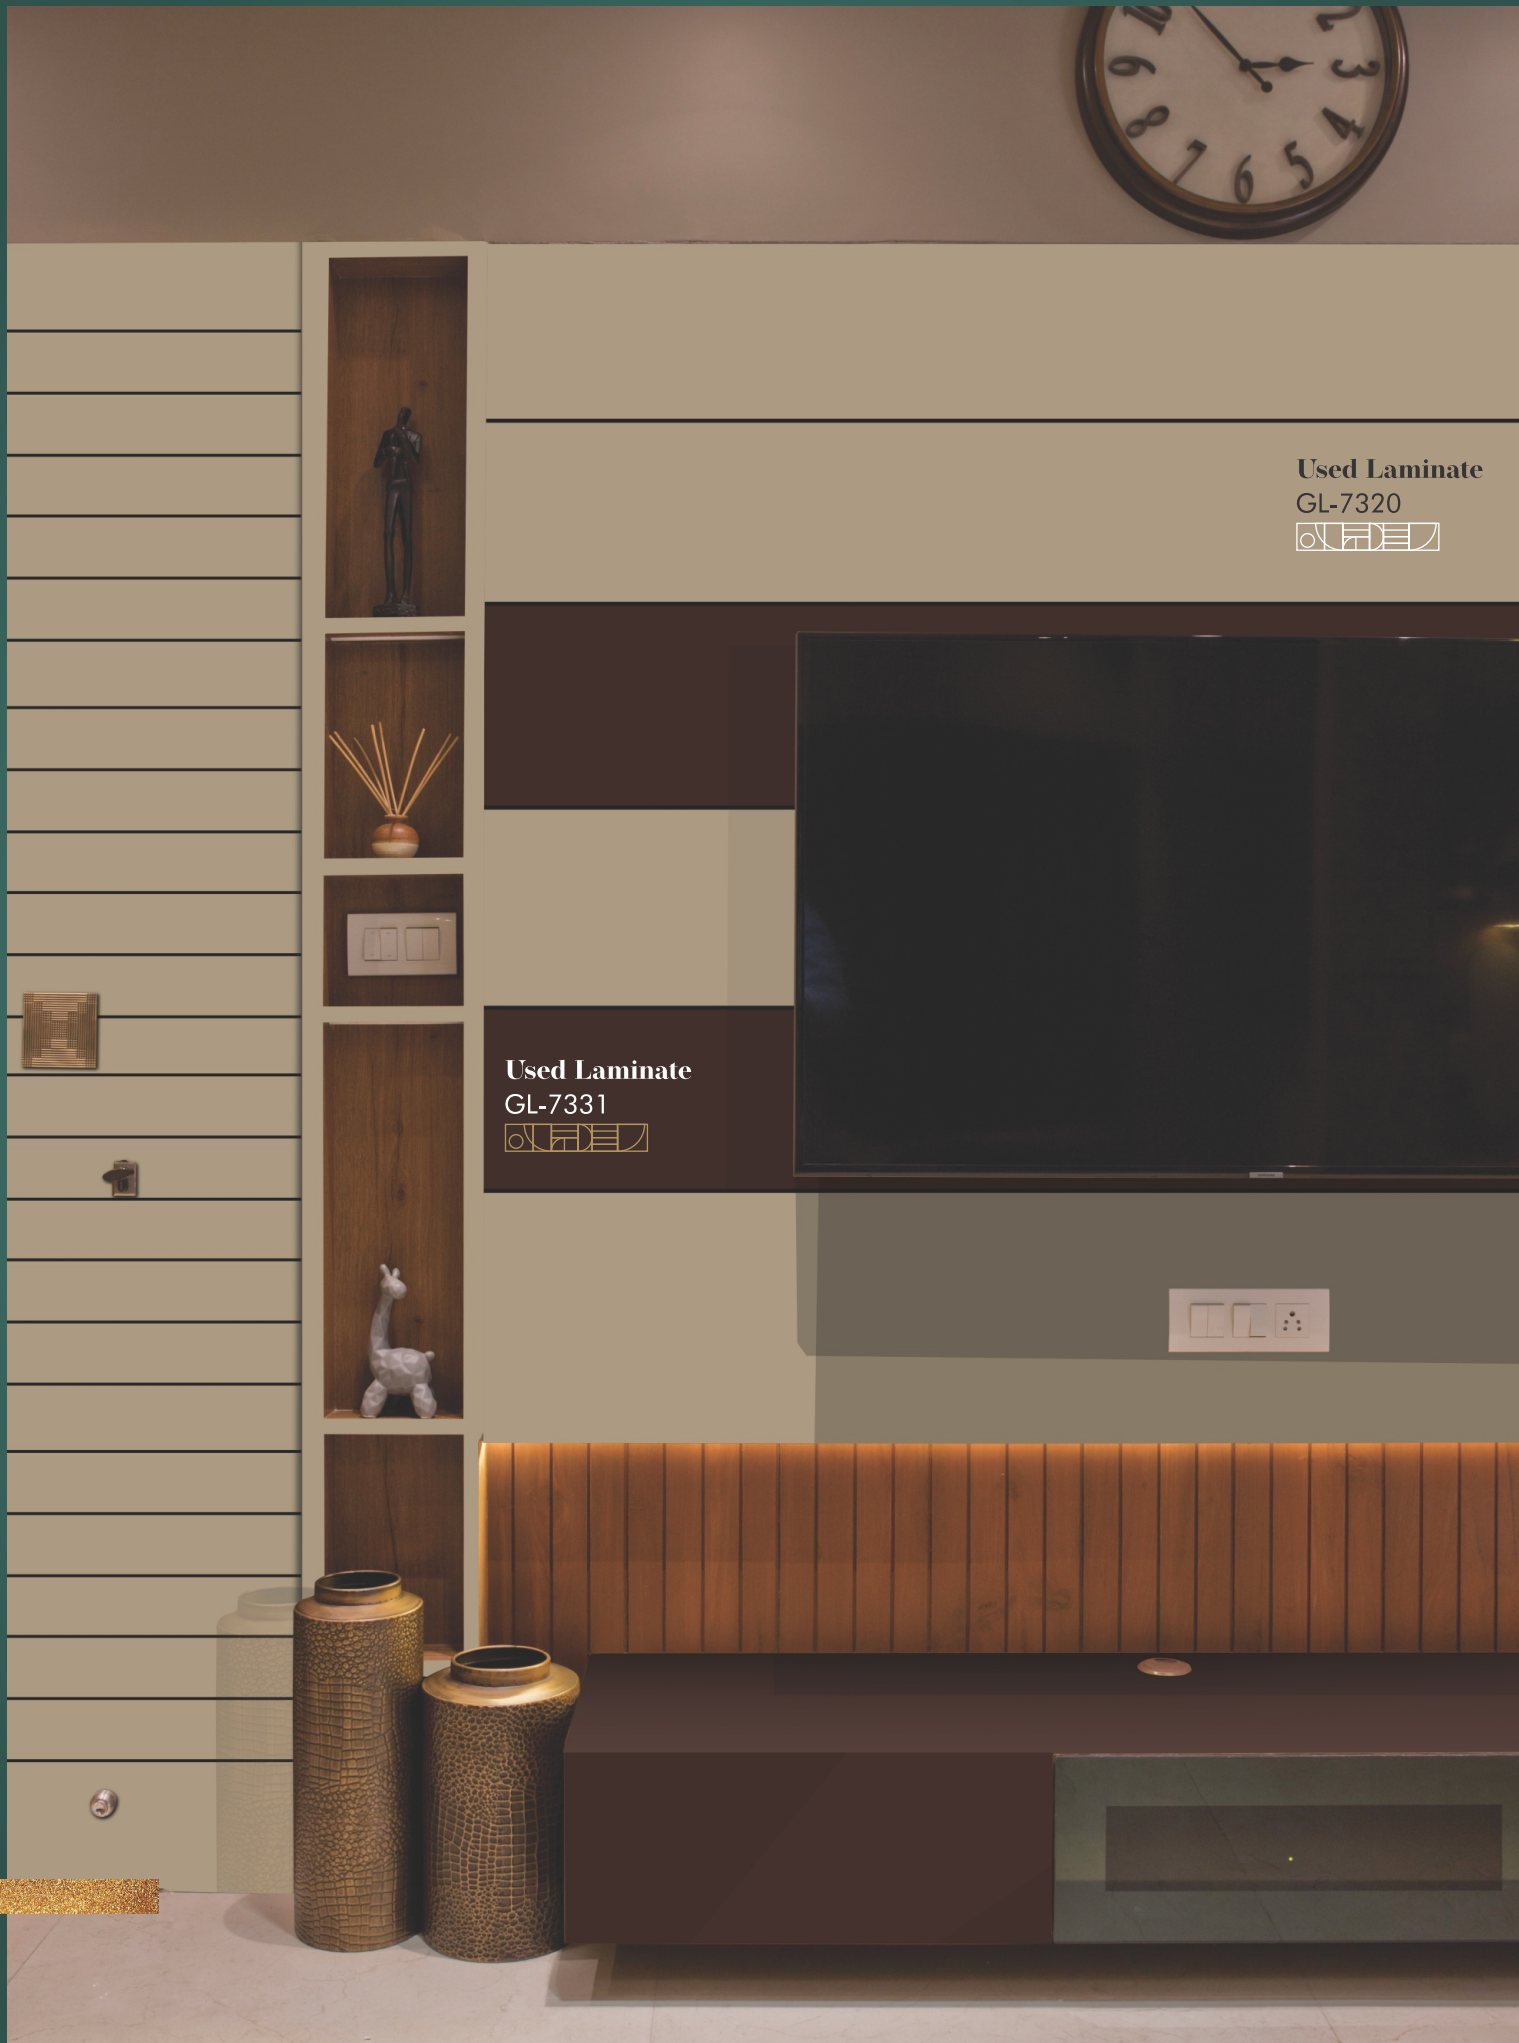

Used Laminate
GL-7320

Used Laminate
GL-7331



GL-7333

Available Edge Bend in
1.3 mm Thickness : **GEB-13929**




GL-7337

Available Edge Bend in
1.3 mm Thickness : **GEB-13923**



GL-7334



GL-7345

Available Edge Bend in
1.3 mm Thickness : **GEB-13906**





ANTI-YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL




Used Laminate
GL-7334




Used Laminate
GL-7337





GL-7339




GL-7329

Available Edge Bend in
1.3 mm Thickness : GEB-14836



GL-7311



GL-7321

Available Edge Bend in
1.3 mm Thickness : GEB-14822

ANTI-SCRATCH LAMINATE





Used Laminate

GL-7311



Used Laminate

GL-7329





GL-7308

Available Edge Bend in
1.3 mm Thickness : **GEB-14825**



GL-7324

Available Edge Bend in
1.3 mm Thickness : **GEB-14824**



GL-7323



GL-7322



ANTI-SCRATCH LAMINATE





ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-7323




Used Laminate
GL-7324





GL-7302

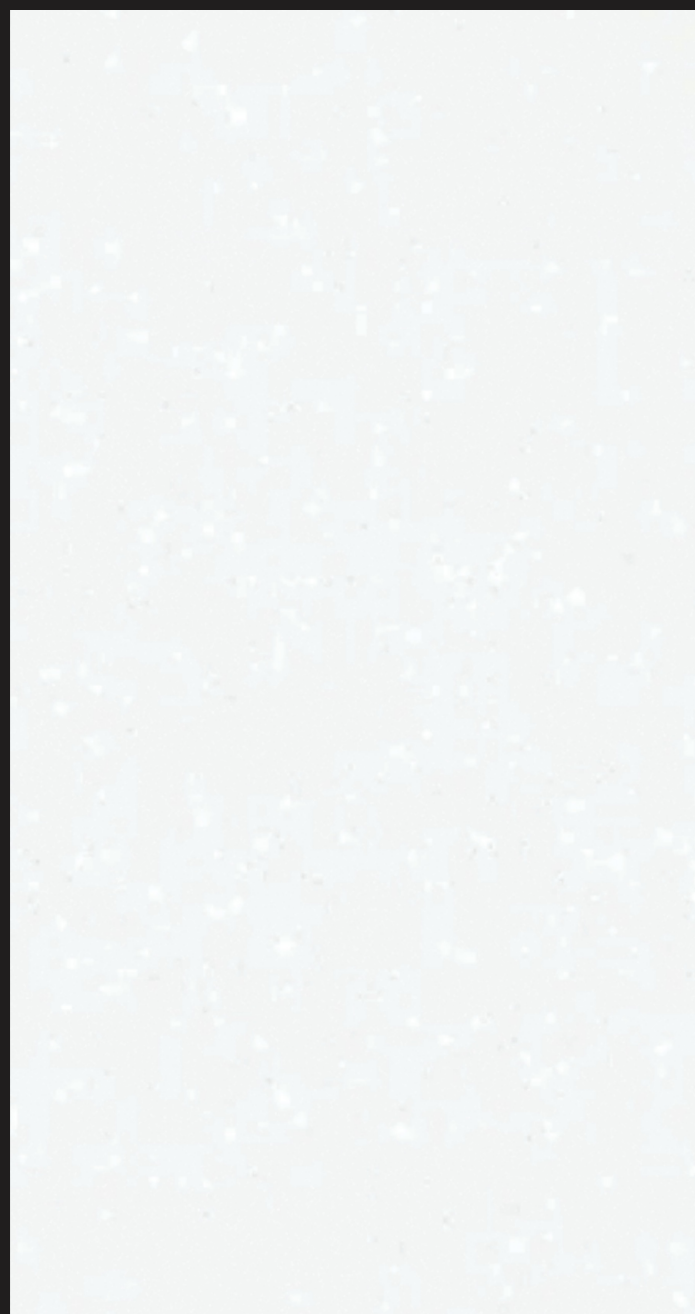


GL-7307

Available Edge Bend in
1.3 mm Thickness : **GEB-14801**



GL-7304

Available Edge Bend in
1.3 mm Thickness : **GEB-14812**

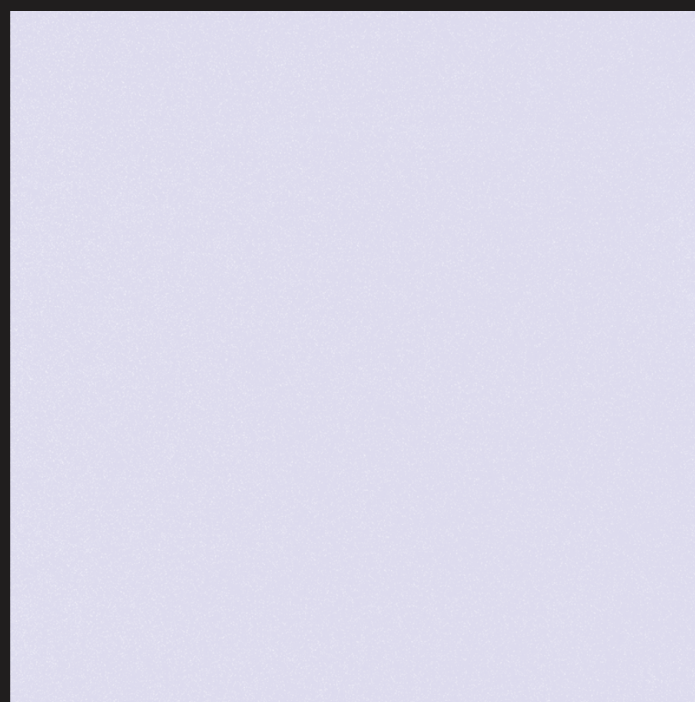

GL-7309

ANTI-SCRATCH LAMINATE



Enamouring



ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-7304



Used Laminate
GL-7302



I N S P I R A T I O N O F M O D E R N



GL-7314



GL-7318



GL-7319

Available Edge Bend in
1.3 mm Thickness : **GEB-13909**



GL-7316



GL-7303



GL-7335

ANTI-SCRATCH LAMINATE



Enamouring



ANTI YELLOW



EASY TO CLEAN



HIGH GLOSS LEVEL



Used Laminate
GL-7335



Used Laminate
GL-7303



GLOIRIO[®]
style your interior



| www.gloirioworld.com



| [gloirioworld](https://www.instagram.com/gloirioworld)

For more details subscribe to our  YouTube channel '**GLOIRIO VOUGUE DECOR**' for information about products, its installation and new exciting offers